

### ■ Specifications

#### Electrical

Voltage Rating: 250VAC

Current Rating: 2.0A

Contact Resistance: 20mΩ MAX

Dielectric Withstanding Voltage: 800VAC/1 min.

Insulation Resistance: 1000MΩ min.

#### Material and Finish

Circuits: 2~16

Insulator: PA66 UL 94V-0


Color: Natural

Contact: Brass 1.14mm (0.45") Square Wire Pins


Plating: Tin Plated

Temperature Range: -25°C ~ +85°C

### ■ Straight Pins

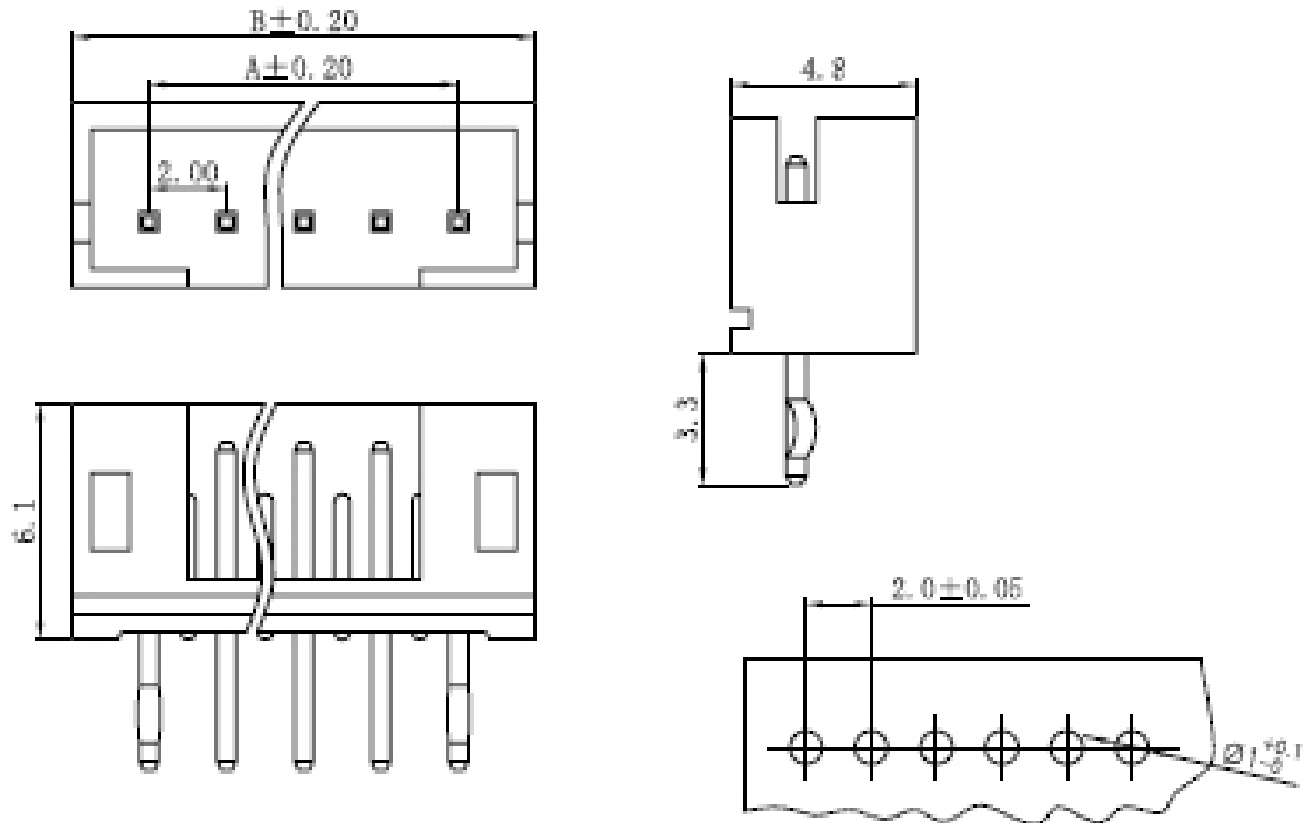

### ■ Right Angle Pins

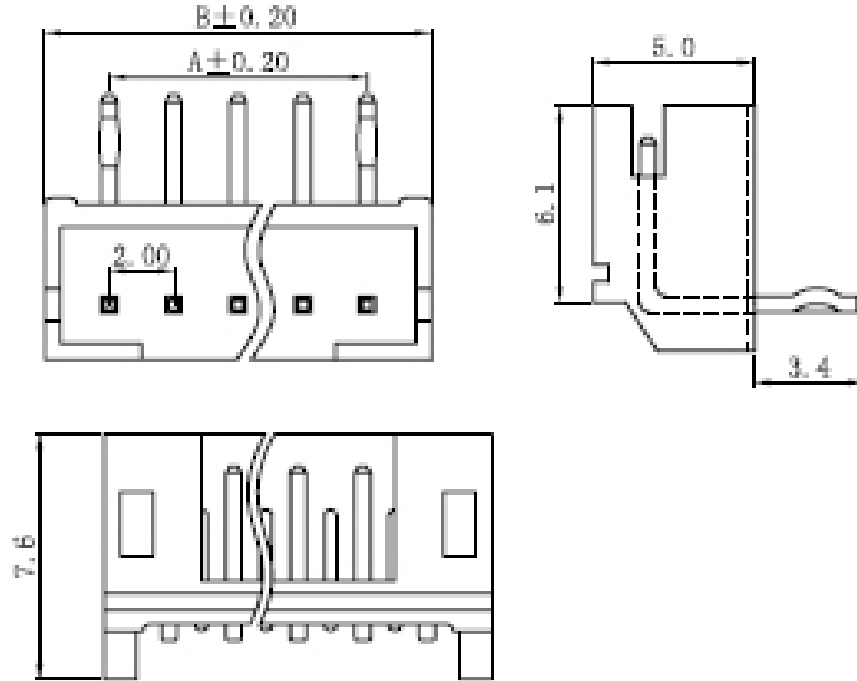

PIN	DIM. (mm)		PIN	DIM. (mm)	
	A	B		A	B
2	2.00	6.00	10	18.00	22.00
3	4.00	8.00	11	20.00	24.00
4	6.00	10.00	12	22.00	26.00
5	8.00	12.00	13	24.00	28.00
6	10.00	14.00	14	26.00	30.00
7	12.00	16.00	15	28.00	32.00
8	14.00	18.00	16	30.00	34.00
9	16.00	20.00			

**JVT1120 W NO - 02 SN R - D**  
 1 2 3 4 5 6 7 8

1 = SERIES  
 2 = PRODUCT TYPE  
 3 = MATERIAL RATING  
 4 = # PINS  
 5 = PLATING  
 6 = PIN TYPE  
 7 = SPECIAL CODE  
 8 = INTERNAL CODE

#### PLATING OPTIONS PIN TYPES

G0 = Gold Flash

SN = Tin

#### # of PINS

2 - 12

#### MATERIAL RATING

NO = UL 94V-0

N2 = UL 94V-2

BLANK = Straight

R = Right Angle

#### PRODUCT TYPE

W = Wafer

H = Housing

#### SPECIAL CODE

example:

GR = green color