



Specifications


Electrical

Voltage Rating: 250VAC
 Current Rating: 3.0A
 Contact Resistance: 20mΩ MAX
 Dielectric Withstanding Voltage: 1000VAC/1 min.
 Insulation Resistance: 1000MΩ min.

Material and Finish

Circuits: 2x02~2x25
 Insulator: PA66 UL 94V-0
 Color: Natural
 Contact: Brass 0.5mm Square Wire Pins
 Plating: Tin Plated
 Temperature Range: -25°C ~ +85°C

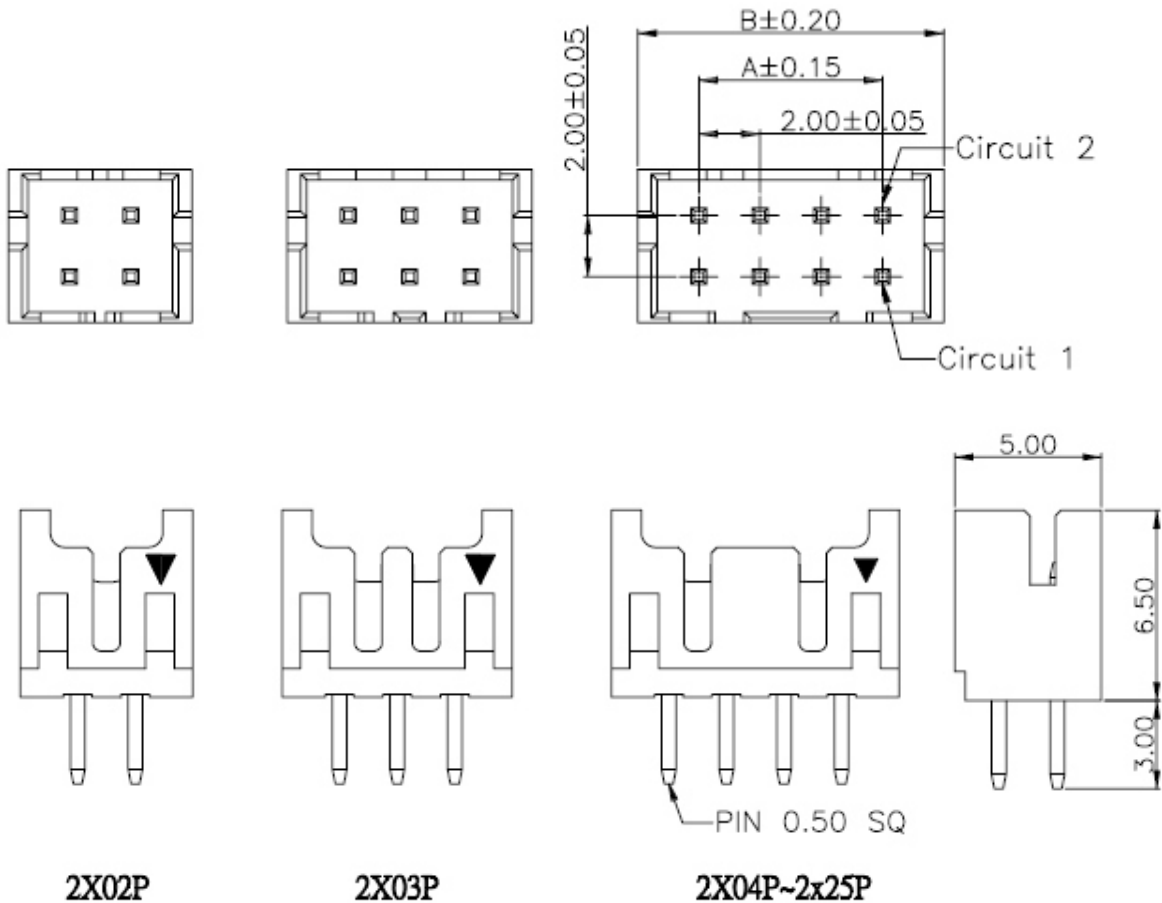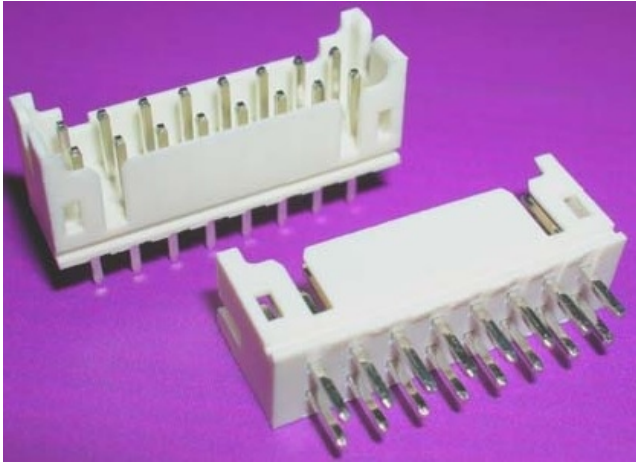

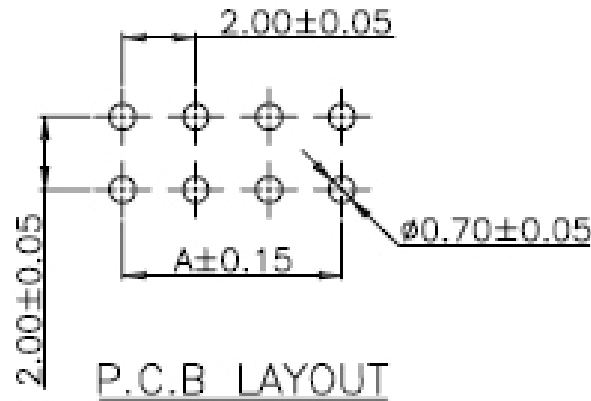

PIN	DIM. (mm)		PIN	DIM. (mm)	
	A	B		A	B
2X02	2.00	6.00	2X14	26.00	30.00
2X03	4.00	8.00	2X15	28.00	32.00
2X04	6.00	10.00	2X16	30.00	34.00
2X05	8.00	12.00	2X17	32.00	36.00
2X06	10.00	14.00	2X18	34.00	38.00
2X07	12.00	16.00	2X19	36.00	40.00
2X08	14.00	18.00	2X20	38.00	42.00
2X09	16.00	20.00	2X21	40.00	44.00
2X10	18.00	22.00	2X22	42.00	46.00
2X11	20.00	24.00	2X23	44.00	48.00
2X12	22.00	26.00	2X24	46.00	50.00
2X13	24.00	28.00	2X25	48.00	52.00

JVT1120 W NO - 02 SN R - D
 1 2 3 4 5 6 7 8

- 1 = SERIES
- 2 = PRODUCT TYPE
- 3 = MATERIAL RATING
- 4 = # PINS
- 5 = PLATING
- 6 = PIN TYPE
- 7 = SPECIAL CODE
- 8 = INTERNAL CODE

PLATING OPTIONS PIN TYPES

G0 = Gold Flash

SN = Tin

of PINS

2 - 12

MATERIAL RATING

NO = UL 94V-0

N2 = UL 94V-2

BLANK = Straight

R = Right Angle

PRODUCT TYPE

W = Wafer

H = Housing

SPECIAL CODE

example:

GR = green color