


Specifications




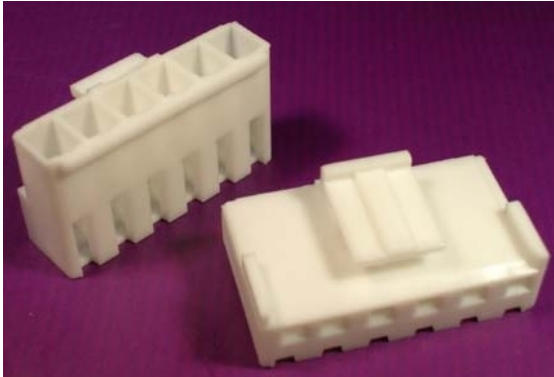


Electrical

Voltage Rating: 250VAC
 Current Rating: 10.0A
 Contact Resistance: 10mΩ MAX
 Dielectric Withstanding Voltage: 1500VAC/1 min.
 Insulation Resistance: 1000MΩ min.

Housing

Places: 2~15
 Insulator: PA66 UL 94V-0
 Color: Natural
 Temperature Range: -25°C ~ +85°C

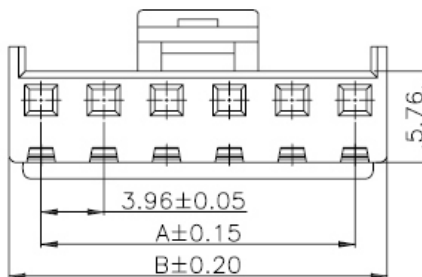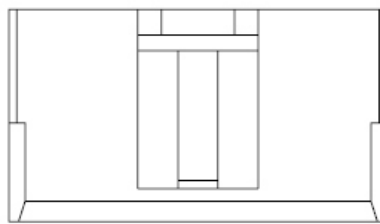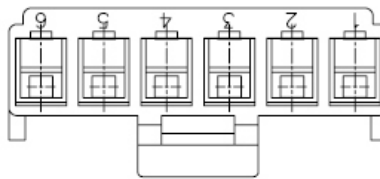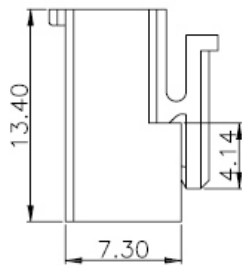

Poles	Dimensions mm	
	A	B
2	3,96	8,02
3	7,92	11,98
4	11,88	15,94
5	15,84	19,90
6	19,80	23,86
7	23,76	27,82
8	27,72	31,78
9	31,68	35,74
10	35,64	39,70
11	39,60	43,66
12	43,56	47,62
13	47,52	51,58
14	51,48	55,54
15	55,44	59,50

JVT1120 W NO - 02 SN R - D
 1 2 3 4 5 6 7 8

1 = SERIES
 2 = PRODUCT TYPE
 3 = MATERIAL RATING
 4 = # PINS
 5 = PLATING
 6 = PIN TYPE
 7 = SPECIAL CODE
 8 = INTERNAL CODE

PLATING OPTIONS

GO = Gold Flash
 SN = Tin

of PINS

2 - 12

MATERIAL RATING

NO = UL 94V-0
 N2 = UL 94V-2

PIN TYPES

BLANK = Straight
 R = Right Angle

PRODUCT TYPE

W = Wafer
 H = Housing

SPECIAL CODE

example:
 GR = green color